

ShowerSelect

Thermostatic mixer for concealed installation for 2 outlets with hose connection and shower holder

Surfaces: **chrome** Art. no. : **15765000**



Description

product features

- designed to run 2 outlets
- multiple outlets can be run simultaneously
- Select push button on / off control for 2 outlets
- wall-mounted
- flow rate hand shower connection 14 l/min at 3 bar
- flow rate upper outlet 29 l/min at 3 bar
- thermostat cartridge, start/ stop cartridge
- Min. operating pressure: 1 bar
- Max. operating pressure: 10 bar
- safety stop at 40°C
- Maximum temperature can be adjusted on installation
- Noise class: I
- if running with a pump, please specify a universal (negative head) pump
- buttons provided: hand shower and overhead shower
- different symbol buttons can be ordered separately
- winner of the iF product design award 2015
- WRAS 1507304

Article Details

Price excl. VAT

£ 666.67

Technology



Design awards



reddot award 2014
winner



DESIGN
AWARD
2015


Certificates



Product image



Scale drawing

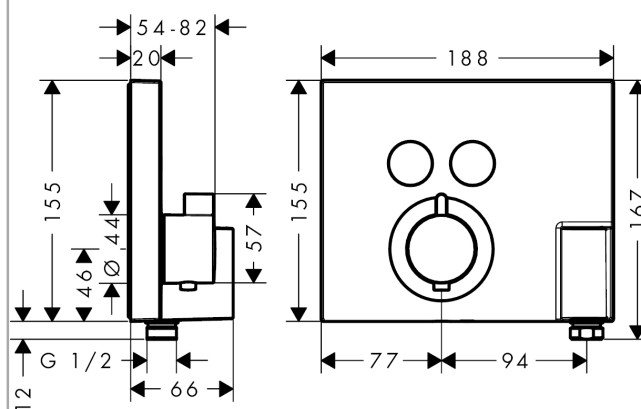

ShowerSelect

Thermostatic mixer for concealed installation for 2 outlets with hose connection and shower holder

Surfaces: **chrome** Art. no. : **15765000**



Flowchart

