

Sanibest Pro



7 m
110 m



PRODUCT BENEFITS

- High performance macerator
- Suitable for commercial premises
- Can deal with occasional obstructions
- Easy maintenance with access from the top of the unit

CONNECTIONS

← External discharge diameter: 22/28/32 mm

• Access directly to the electrics via the lid

→ External inlet diameter: 40/100 mm



Pro X K2 grinder




PACK CONTAINS

Sanibest Pro, non-return valve, connectors, activated carbon filter included to neutralise odours

CURVE

Discharge height (m)

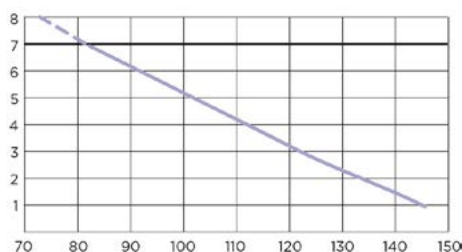

Flow rate (l/min)

TECHNICAL FEATURES



Number of inlets	4
External inlet diameter	40/100 mm
External discharge diameter	22/28/32 mm
Shower tray height	15 cm
Max. incoming temperature	35°C
Voltage - Frequency	220-240 V - 50-60 Hz
Motor power	1100 W
IP rating	IP44
Electrical class	I
Identification and logistics	
Gross weight	12 kg
Barcode	3308815013039
Product code	1053

OPTIONAL EXTRAS

Sanialarm
Barcode: 3308810042799
Product code: 1095



DIMENSIONS

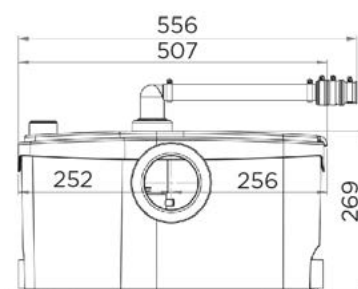

Dimensions (mm)