

# Sanicompact



3 m  
30 m



## PRODUCT BENEFITS

- Ultra-compact toilet with built-in macerator
- Has a depth of just 430 mm
- Able to add a wash basin to this small WC for a cloakroom
- Flow rate >100 l/min and requires a minimum dynamic pressure of 1.7 bar water supply

## CONNECTIONS

← External discharge diameter: 32 mm

→ External inlet diameter: 40 mm



Multi-cutter disc




## PACK CONTAINS

Sanicompact, non-return valve, floor fixings

## CURVE

Discharge height (m)

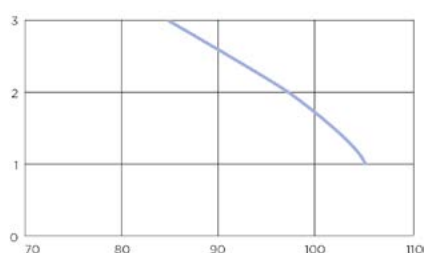


Flow rate (l/min)

## TECHNICAL FEATURES

Number of inlets	1
External inlet diameter	40 mm
External discharge diameter	32 mm
Max. incoming temperature	35°C
Flush volume	1.8/3 L
Voltage - Frequency	220-240 V - 50-60 Hz
Motor power	550 W
IP rating	IP44
Electrical class	I
Noise level	51 dB(A)
Identification and logistics	
Gross weight	25 kg
Barcode	3308815013268
Product code	1081

## DIMENSIONS

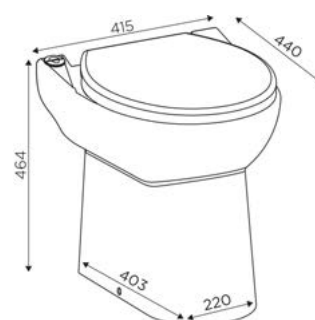

Dimensions (mm)